



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/696,236	10/28/2003	Thomas Lloyd Credelle	CLVT02913-1P US	5279
90323	7590	11/22/2010		
Innovation Counsel LLP 21771 Stevens Creek Blvd Ste. 200A Cupertino, CA 95014			EXAMINER MOON, SEOKYUN	
			ART UNIT	PAPER NUMBER
			2629	
			MAIL DATE	DELIVERY MODE
			11/22/2010	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Office Action Summary	Application No. 10/696,236	Applicant(s) CREDELLE, THOMAS LLOYD	
	Examiner SEOKYUN MOON	Art Unit 2629	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 09 September 2010.
- 2a) ☒ This action is **FINAL**. 2b) ☐ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-5, 8-21, 25, 26 and 28-35 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-5, 8-21, 25-26, and 28-35 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 16 March 2007 is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
 2. ☐ Certified copies of the priority documents have been received in Application No. _____.
 3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

* See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- | | |
|---|---|
| 1) <input checked="" type="checkbox"/> Notice of References Cited (PTO-892) | 4) <input type="checkbox"/> Interview Summary (PTO-413) |
| 2) <input type="checkbox"/> Notice of Draftperson's Patent Drawing Review (PTO-948) | Paper No(s)/Mail Date. _____ |
| 3) <input type="checkbox"/> Information Disclosure Statement(s) (PTO/SB/08) | 5) <input type="checkbox"/> Notice of Informal Patent Application |
| Paper No(s)/Mail Date _____ | 6) <input type="checkbox"/> Other: _____ |

DETAILED ACTION

Status of Claims in the Last Office Action

1. Claims 1-5, 8-14, 25, 28, and 31 were rejected under 35 U.S.C. 112, first paragraph, as failing to comply with the written description requirement.

Claims 1-4, 8-11, 13-21, 25-26, and 28-31 were rejected under 35 U.S.C. 103(a) as being unpatentable over U.S. Patent 6,326,981 by Mori et al. (herein after “Mori”) in view of U.S. Patent No. 6,714,206 by Martin et al. (herein after “Martin”).

Claims 5 and 12 were rejected under 35 U.S.C. 103(a) as being unpatentable over Mori and Martin, and further in view of U.S. Patent No. 5,841,411 by Francis.

Remarks

2. Upon a further review/consideration of the claims, the rejections of claims 1-5, 8-14, 25, 28, and 31 under 35 U.S.C. 112, first paragraph have been withdrawn.

Response to Arguments


3. Regarding the rejection of claim 1, the Applicant argues [Remarks: pg 17, the middle portion of the page], “... combining of Mori and Martin is not suggested by or otherwise made apparent by the prior art. The pentile structure of Martin is substantially different than the more conventional rectangular array arrangement of Mori. Each of these structurally different arrangements can have very different behaviors in terms of, not only cross talk as between adjacent subpixels, but also in terms of visual artifacts that may present themselves to the

Art Unit: 2629

unpredictable and complex human visual system. As a result, there is no suggestion to modify Mori to obtain the technical features of the present Claim 1”.

Examiner respectfully disagrees.

Examiner respectfully submits that the fact that there is a difference between the cited prior arts (i.e. the structurally different arrangements of Mori and Martin, according to the Applicant’s above argument) does not prove that there is no suggestion to combine the cited prior arts. As explained in page 7 the last paragraph of the last Office action, the motivation to apply the teaching of Martin to the display of Mori is to allow the display of Mori to provide more uniform color illumination. Please see the drawing provided below for further explanation. As shown below, by applying the teaching of Martin to the display of Mori, each row of the display would have more colors (GBRGBR instead of GBGGBG) in each row and in each sub-region and thus would provide more uniform color distribution.

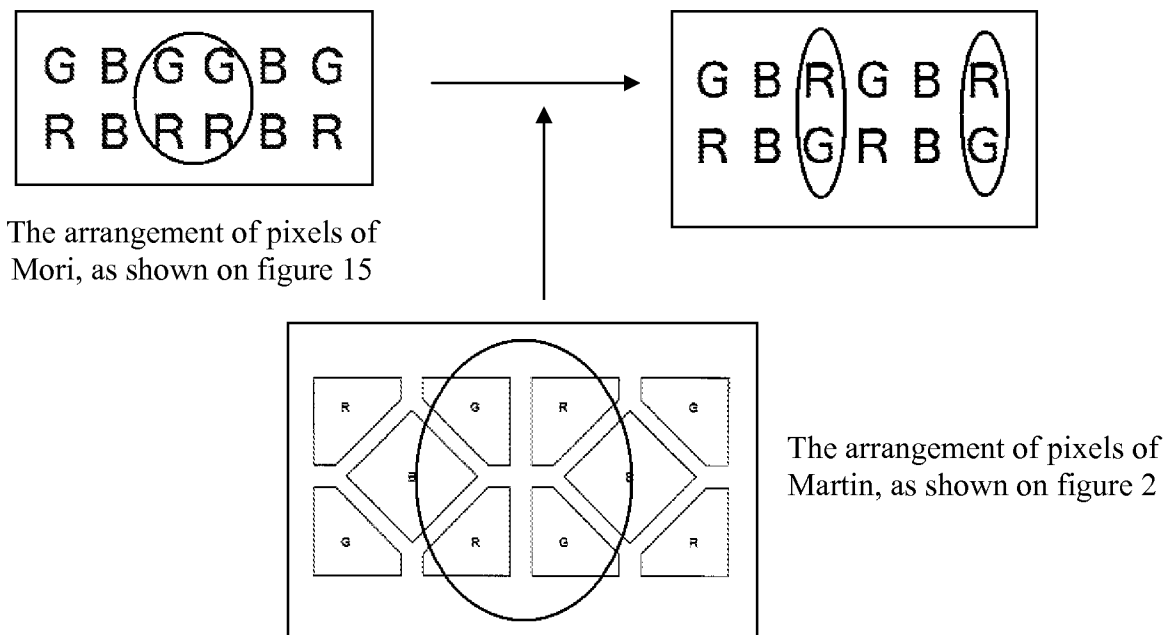

Art Unit: 2629

Regarding the rejection of claim 1, the Applicant further argues [Remarks: pg 17 the 2nd last paragraph] that Mori does not teach “such that potential image degradation introduced by the periodic dot inversion polarity scheme is localized on said one or more of the columns of first colored subpixels”.

Examiner respectfully disagrees.

As explained in page 6 the last paragraph of the last Office action, applying a two-line inversion polarity scheme to the display of Mori would result in two adjacent blue subpixels arranged in a column to be driven by the driving signals having the same polarity, as shown on drawing 2 provided on page 8 of the last Office action. Driving the two adjacent blue subpixels arranged in a column with the same polarity would result in a vertical crosstalk and thus the image degradation of blue colors would be localized on the column of the two blue subpixels. Accordingly, Examiner respectfully submits that Mori as modified in the rejection of claim 1 does teach the above claim limitation.

For the similar reasons, Examiner respectfully submits that the Applicant’s arguments regarding the rejections of claim 8, 13, 15, and 20 are not persuasive.

Claim Rejections - 35 USC § 112

4. The following is a quotation of the first paragraph of 35 U.S.C. 112:

The specification shall contain a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the same and shall set forth the best mode contemplated by the inventor of carrying out his invention.

5. **Claims 32-34** are rejected under 35 U.S.C. 112, first paragraph, as failing to comply with the written description requirement. The claim(s) contains subject matter which was not

Art Unit: 2629

described in the specification in such a way as to reasonably convey to one skilled in the relevant art that the inventor(s), at the time the application was filed, had possession of the claimed invention.

The claim discloses [lines 4-5], “the primitive subpixel repeating group being a **smallest** chooseable repeating group among possible repeating groups substantially tessellating the panel”. However, the claim further discloses [lines 8-10] “said primitive repeating group including in each row thereof, a first colored subpixel, a second colored subpixel and a third colored subpixel, which have different colors from each other” and [lines 10-12] “said primitive subpixel repeating group being tessellated in a staggered manner over said panel so as to thereby define both multi-colored columns and spaced apart uni-colored columns”. Since the claim discloses that the repeating group includes spaced apart uni-colored columns and at least three different colored subpixels, the repeating group must include at least the subpixel arrangement “RBGB”. However, Examiner respectfully submits that the subpixel arrangement “RBGB” is **not the smallest chooseable repeating group** among possible repeating groups substantially tessellating the panel. According to figure 6 of the instant Application, the smallest chooseable repeating group is a group of any two adjacent subpixels such as the subpixel arrangement of “RB” or “GB”.

Appropriate correction/explanation is required.

Claim Rejections - 35 USC § 103

6. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

Art Unit: 2629

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.


7. **Claims 1-4, 8-11, 13-21, 25-26, and 28-31** are rejected under 35 U.S.C. 103(a) as being unpatentable over Mori in view of Martin.

As to **claim 1**, Mori teaches a liquid crystal display [abstract lines 1-2] comprising:

a panel [fig. 4, col. 4 lines 1-2, and drawing 1 provided below] substantially tessellated by a subpixel repeating group comprising differently colored and individually addressable subpixels and having an even number of individually addressable subpixels including a first colored subpixel [drawing 1], a second colored subpixel, and a third colored subpixel, in a row (Note that, in the display of Mori, the second and third colors are same), the subpixel repeating group further comprising a column of first colored subpixels (the two blue subpixels arranged in one column of the subpixel repeating group as shown on drawing 1), where the color of the first colored subpixels (the two blue subpixels arranged in one column of the subpixel repeating group as shown on drawing 1) is one to which the human visual system has lower luminance change sensitivity than to other colors of other colored ones of the subpixels in the subpixel repeating group (The blue color is the color to which the human visual system has lower luminance change sensitivity than to red or green colors.); and

a driver circuit sending to the panel, image signals representing image data [col. 1 lines 47-52 and col. 12 lines 12-17].

Art Unit: 2629

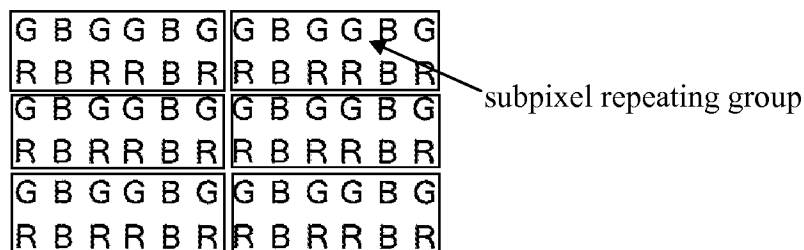

Mori does not teach that the dri Drawing 1 a substantially periodic dot inversion polarity scheme at one or more of the columns of first colored subpixels such that potential image degradation introduced by the periodic dot inversion polarity scheme is localized on the one or more of the columns of first colored subpixels.

However, Examiner takes Official Notice that it is well known in the art to use a periodic 2-line inversion polarity scheme as a driving method of a liquid crystal display (Note that the Applicant has claimed the polarity arrangement of "+-+-+---+-+-" shown on figures 3-6 of the instant Application, which clearly violates the rule of a dot inversion polarity scheme, i.e. applying driving signals having opposite polarities to any two adjacent pixels or applying driving signals having opposite polarities to any two adjacent groups of pixels, wherein all pixels within the group are driven by the same polarity driving signals, as the "substantially periodic dot inversion". Since only a portion of the polarity arrangement of "+-+-+---+-+-" satisfies the rule of the dot inversion and a portion of a periodic 2-line inversion satisfies the requirement of the dot inversion, Examiner construed a periodic 2-line inversion as the claimed substantially periodic dot inversion.).

Therefore, it would have been obvious to one of ordinary skill in the art at the time of the invention to modify the driver circuit of Mori to use a periodic two-line inversion polarity

Art Unit: 2629

scheme in order to reduce vertical crosstalk caused by driving a plurality of pixels/subpixels with the same polarity.

Mori as modified above teaches that the driver circuit uses a substantially periodic dot inversion polarity scheme at one or more of the columns of first colored subpixels such that potential image degradation introduced by the periodic dot inversion polarity scheme is localized on the one or more of the columns of first colored subpixels (By having two blue subpixels having the same polarity in one column, the vertical crosstalk occurs and the image degradation of blue colors caused by the vertical crosstalk occurs.) [drawing 2 provided below, which is same as figure 15 of Mori with the two-line inversion polarity scheme].

G ⁺	B ⁺	G ⁺	G ⁺	B ⁺	G ⁺
R ⁺	B ⁺	R ⁺	R ⁺	B ⁺	R ⁺
G ⁻	B ⁻	G ⁻	G ⁻	B ⁻	G ⁻
R ⁻	B ⁻	R ⁻	R ⁻	B ⁻	R ⁻
G ⁺	B ⁺	G ⁺	G ⁺	B ⁺	G ⁺
R ⁺	B ⁺	R ⁺	R ⁺	B ⁺	R ⁺


Drawing 2

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other. In other words, because Mori teaches two same colored subpixels [drawing 2, “G” and “G”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

Art Unit: 2629

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

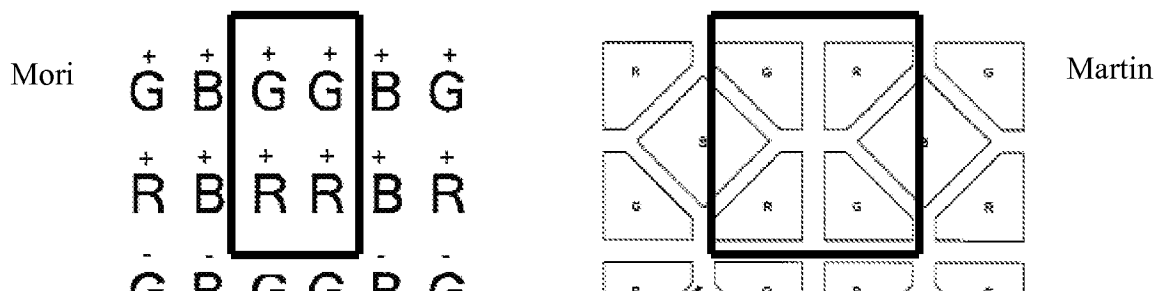

Drawing 3

As to **claim 2**, Mori teaches the first colored subpixels being blue colored subpixels (as discussed with respect to the rejection of claim 1).

As to **claim 3**, Mori as modified by Martin teaches that the subpixel repeating group substantially comprises a checkerboard of red and green subpixels interspersed with two columns of blue subpixels [the drawing provided on page 3 of this Office action].

Art Unit: 2629

As to **claim 4**, Mori teaches that for each the subpixel repeating group, the two columns of blue subpixels share a same column driver [fig. 25, “source driver 106”] (Note that, in the display of Mori, all subpixels share the same column driver.).

As to **claim 8**, Mori teaches a method of driving a liquid crystal display having a panel [fig. 4, col. 4 lines 1-2, and drawing 1 provided on page 6 of this Office Action] that is substantially tessellated by a subpixel repeating group comprising differently colored and individually addressable subpixels and having an even number of individually addressable subpixels including a first colored subpixel [drawing 1], a second colored subpixel, and a third colored subpixel, in a row (Note that, in the display of Mori, the second and third colors are same), the subpixel repeating group further comprising a column of first colored subpixels (the two blue subpixels arranged in one column of the subpixel repeating group as shown on drawing 1), where the color of the first colored subpixels (the two blue subpixels arranged in one column of the subpixel repeating group as shown on drawing 1) is one to which the human visual system has lower luminance change sensitivity than to other colors of other colored ones of the subpixels in the subpixel repeating group (The blue color is the color to which the human visual system has lower luminance change sensitivity than to red or green colors.); the method comprising:

providing driver signals to the subpixels in the panel [col. 1 lines 47-52 and col. 12 lines 12-17].

Mori does not teach that the providing of the driver signals uses a substantially periodic dot inversion polarity scheme at one or more of the columns of first colored subpixels such that

Art Unit: 2629

the potential image degradation introduced by the periodic dot inversion polarity scheme is localized on the one or more of the columns of first colored subpixels.

However, Examiner takes Official Notice that it is well known in the art to use a periodic 2-line inversion polarity scheme as a driving method of a liquid crystal display (Note that the Applicant has claimed the polarity arrangement of "+-+-+---+-+-" shown on figures 3-6 of the instant Application, which clearly violates the rule of a dot inversion polarity scheme, i.e. applying driving signals having opposite polarities to any two adjacent pixels or applying driving signals having opposite polarities to any two adjacent groups of pixels, wherein all pixels within the group are driven by the same polarity driving signals, as the "substantially periodic dot inversion". Since only a portion of the polarity arrangement of "+-+-+---+-+-" satisfies the rule of the dot inversion and a portion of a periodic 2-line inversion satisfies the requirement of the dot inversion, Examiner construed a periodic 2-line inversion as the claimed substantially periodic dot inversion.).

Therefore, it would have been obvious to one of ordinary skill in the art at the time of the invention to modify the method of Mori to use a periodic two-line inversion polarity scheme in order to reduce vertical crosstalk caused by having a plurality of pixels/subpixels driven by the same polarity.

Mori as modified above teaches that the providing of the driver signals uses a substantially periodic dot inversion polarity scheme at one or more of the columns of first colored subpixels such that potential image degradation introduced by the periodic dot inversion polarity scheme is localized on the one or more of the columns of first colored subpixels (By having two blue subpixels having the same polarity in one column, the vertical crosstalk occurs

Art Unit: 2629

and the image degradation of blue colors caused by the vertical crosstalk occurs.) [drawing 2 provided on page 8 of this Office action, which is same as figure 15 of Mori with the two-line inversion polarity scheme].

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other. In other words, because Mori teaches two same colored subpixels [drawing 2, “G” and “G”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

As to **claim 9**, Mori teaches the column of first colored subpixels being the column of blue subpixels [drawing 2 provided on page 8 of this Office Action].

As to **claim 10**, Mori as modified by Martin teaches that the subpixel repeating group is characterized by a checkerboard of red and green subpixels interspersed with two columns of blue subpixels [drawing 3 provided on page 9 of this Office action].

Art Unit: 2629

As to **claim 11**, Mori as modified by Martin teaches that for each subpixel repeating group, the providing driver signals includes providing of scheme violating signals (the signals violating the one-dot inversion polarity scheme) to the two columns of blue subpixels from a same column driver [fig. 25, "source driver 106"].

As to **claim 13**, Mori teaches a method of driving a liquid crystal display having a panel [fig. 4, col. 4 lines 1-2, and drawing 1 provided on page 6 of this Office Action] that is substantially tessellated by a subpixel repeating group [drawing 1] comprising differently colored and individually addressable subpixels and having an even number of individually addressable subpixels including a first colored subpixel [drawing 1], a second colored subpixel, and a third colored subpixel, in a row, the subpixel repeating group further comprising at least one column of blue subpixels (the two blue subpixels arranged in one column of the subpixel repeating group as shown on drawing 1); and the method comprising:

providing signals for image data [col. 1 lines 47-52 and col. 12 lines 12-17].

Mori does not teach the method comprising providing signals for image data having a substantially periodic dot inversion polarity scheme to the panel with use of a driver circuit outputting at least two phases such that it primarily impacts the at least one column of blue subpixels.

However, Examiner takes Official Notice that it is well known in the art to use a periodic 2-line inversion polarity scheme as a driving method of a liquid crystal display (Note that the Applicant has claimed the polarity arrangement of "+-+-+---+-+-" shown on figures 3-6 of the instant Application, which clearly violates the rule of a dot inversion polarity scheme, i.e. applying driving signals having opposite polarities to any two adjacent pixels or applying driving

Art Unit: 2629

signals having opposite polarities to any two adjacent groups of pixels, wherein all pixels within the group are driven by the same polarity driving signals, as the “substantially periodic dot inversion”. Since only a portion of the polarity arrangement of “+-+--+--+--+” satisfies the rule of the dot inversion and a portion of a periodic 2-line inversion satisfies the requirement of the dot inversion, Examiner construed a periodic 2-line inversion as the claimed substantially periodic dot inversion.).

Therefore, it would have been obvious to one of ordinary skill in the art at the time of the invention to modify the method of Mori to use a periodic two-line inversion polarity scheme in order to reduce vertical crosstalk caused by having a plurality of pixels/subpixels driven by the same polarity.

Mori as modified above teaches the concept of providing signals for image data having a substantially periodic dot inversion polarity scheme to the panel with use of a driver circuit outputting at least two phases such that it primarily impacts the at least one column of blue subpixels (By having two blue subpixels having the same polarity in one column, the vertical crosstalk occurs and the image degradation of blue colors caused by the vertical crosstalk occurs.) [drawing 2 provided on page 8 of this Office action, which is same as figure 15 of Mori with the two-line inversion polarity scheme].

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other. In other words, because Mori teaches two same colored subpixels [drawing 2, “G” and “G”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

Art Unit: 2629

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

As to **claim 14**, Mori as modified above teaches the method comprising providing a correction signal to one or more subpixels (Note that providing the image signals having the two-line inversion polarity scheme is to correct the image degradation caused by having the subpixels having the same polarity all the time).

As to **claim 15**, Mori teaches a liquid crystal display [abstract lines 1-2], comprising:

a display panel [fig. 4, col. 4 lines 1-2, and drawing 1 provided on page 6 of this Office Action] including a plurality of subpixels arranged in a subpixel repeating group; the subpixel repeating group comprising an even number of subpixels including a first colored subpixel, a second colored subpixel, and a third colored subpixel, in a row, and including a column of dark colored subpixels [drawing 1]; and

means [col. 1 lines 47-52 and col. 12 lines 12-17] for providing driver signals to the subpixels in the display panel to send image data.

Art Unit: 2629

Mori does not expressly teach the means for providing the driver signals to the subpixels in the display panel to send image data having a dot inversion polarity scheme.

However, Examiner takes Official Notice that it is well known in the art to use a dot inversion polarity scheme as a driving method of a liquid crystal display.

Therefore, it would have been obvious to one of ordinary skill in the art at the time of the invention to modify the means for providing the driver signals to send image data having a dot inversion polarity scheme in order to reduce vertical crosstalk caused by having a plurality of pixels/subpixels driven by the same polarity.

Mori as modified above inherently teaches that the image degradation introduced by the driver signals is localized on the column of dark colored subpixels since any image degradation caused by the dot inversion scheme would degrade the quality of the images to be displayed by all of subpixels and thus image degradation related to blue colors would be localized on the column of blue colored subpixels, which are dark colored subpixels.

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other. In other words, because Mori teaches two same colored subpixels [drawing 2, “G” and “G”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

Art Unit: 2629

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

As to **claim 16**, Mori teaches the column of dark colored subpixels being the column of blue subpixels [drawing 1 provided on page 6 of this Office Action].

As to **claim 17**, Mori as modified by Martin teaches that the subpixel repeating group substantially comprises a checkerboard of red and green subpixels interspersed with two columns of blue subpixels [drawing 3 provided on page 9 of this Office action].

As to **claim 18**, Mori as modified by Martin teaches that the means for providing driver signals provides signals to the two columns of blue subpixels from a same column driver [fig. 25, “source driver 106”].

As to **claim 19**, Mori as modified above teaches the liquid crystal display further comprising means for providing correction signals to one or more subpixels in the group of subpixels (Note that the driver signals used to send image data having a dot inversion polarity scheme corrects the image degradation caused by a plurality of subpixels having a same polarity).

As to **claim 20**, Mori teaches a liquid crystal display [abstract lines 1-2], comprising:

display means including a plurality of subpixels arranged in accordance with a panel tessellating a subpixel repeating group [drawing 1 provided on page 6 of this Office action], the

Art Unit: 2629

subpixel repeating group being characterized by an even number of subpixels including a first colored subpixel, a second colored subpixel, and a third colored subpixel, in a row and including at least one column of blue subpixels [drawing 1]; and

driving means [col. 1 lines 47-52 and col. 12 lines 12-17] for providing signals for image data to the display means.

Mori does not expressly teach the driving means for providing signals for image data having a dot inversion polarity scheme to the display means, wherein the driving means has at least two phases selected such that potential image degradation introduced by the dot inversion polarity scheme is placed substantially upon the at least one column of blue subpixels.

However, Examiner takes Official Notice that it is well known in the art to use a periodic 2-line dot inversion polarity scheme as a driving method of a liquid crystal display.

Therefore, it would have been obvious to one of ordinary skill in the art at the time of the invention to modify the driving means of Mori to provide image data having a periodic two-line dot inversion polarity scheme in order to reduce vertical crosstalk caused by having a plurality of pixels/subpixels driven by the same polarity.

Mori as modified above teaches that the driving means has at least two phases selected (Note that, in the two-line dot inversion, the polarities of the driving signals are inverted every frame) such that potential image degradation introduced by the dot inversion polarity scheme is placed substantially upon the at least one column of blue subpixels (By having two same colored subpixels having the same polarity in one column, the vertical crosstalk occurs.).

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other. In other words, because Mori

Art Unit: 2629

teaches two same colored subpixels [drawing 2, “G” and “G”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

As to **claim 21**, Mori as modified above teaches the liquid crystal display comprising means for providing a correction signal to one or more subpixels (Note that providing the image signals having the two-line dot inversion polarity scheme is to correct the image degradation caused by having subpixels having the same polarity all the time.).

As to **claim 25**, Mori as modified above teaches that the use of a driver circuit [Mori: fig. 25, “106”] comprises providing a plurality of two-phase (Note that, in the two-line inversion, the polarities of the driving signals are inverted every frame) driver chips [Mori: col. 12 lines 15-16] for driving respective bounded sections of the display; wherein phases of each provided driver chip are selected such that parasitic effects placed upon imagery of any of the subpixels driven by the phased signals are placed substantially upon subpixels disposed in columns positioned at a

Art Unit: 2629

boundary of the bounded display sections respectively driven by the driver chips (Note that Examiner construed the two or three outmost columns of the subpixels of the display sections as the claimed boundary sections. Since the two or three outmost columns of the subpixels includes a column of the blue subpixels, the parasitic effects related to blue colors are placed substantially upon the blue subpixels disposed at a boundary of the bounded display sections.).

As to **claim 26**, Mori as modified above teaches that the driving means [Mori: fig. 25, “106”] includes a plurality of two-phase (Note that, in the two-line inversion, the polarities of the driving signals are inverted every frame) driver chips [Mori: col. 12 lines 15-16] for providing signals for the image data having the polarity scheme to respective bounded sections of the display means; wherein the phases of each driver chip are selected such that parasitic effects placed upon imagery of any of the subpixels driven by the phased signals are placed substantially upon blue subpixels disposed in columns positioned at a boundary of the bounded display sections respectively driven by the driver chips (Note that Examiner construed the two or three outmost columns of the subpixels of the display sections as the claimed boundary sections. Since the two or three outmost columns of the subpixels includes a column of the blue subpixels, the parasitic effects related to blue colors are placed substantially upon the blue subpixels disposed at a boundary of the bounded display sections.).

As to **claim 28**, Mori teaches that the driver circuit sends signals indicating image data having a polarity scheme to the panel such that at least two adjacent subpixels in a row have the same polarity [drawing 2 provided on page 8 of this Office action].

As to **claim 29**, Mori as modified above teaches that the means for providing driver signals includes a plurality of two-phase (Note that, in the dot inversion, the polarities of the

Art Unit: 2629

driving signals are inverted every frame) driver chips [Mori: col. 12 lines 15-16] for sending the driver signals to the display panel; the phases of each driver chip being selected such that scheme violations (the polarity scheme violating any polarity scheme other than the dot inversion polarity scheme) introduced by the driver signals are placed substantially upon blue subpixels disposed in columns positioned at a boundary between the driver chips (Note that Examiner construed the two or three outmost columns of the subpixels of the display sections as the claimed boundary sections. Since the two or three outmost columns of the subpixels includes a column of the blue subpixels, the parasitic effects related to blue colors are placed substantially upon the blue subpixels disposed at a boundary of the bounded display sections.).

As to **claim 30**, Mori as modified above teaches that the image degradation is caused by same-color subpixels of same polarity occurring successively one after the next [drawing 2 provided on page 8 of this Office action].

As to **claim 31**, Mori as modified above teaches that the violation tends to cause image degradation due to parasitic effects of parasitic capacitance present in the panel (Note that the vertical cross-talk caused by the vertically arranged subpixels having the same polarity is caused by parasitic or stray capacitive effects between a data line and a pixel electrode of the subpixels.) (as evidenced by US 5,841,411 col. 1 lines 42-49).

8. **Claims 5 and 12** are rejected under 35 U.S.C. 103(a) as being unpatentable over Mori and Martin as applied to claims 1-4, 8-11, 13-21, 25-26, and 28-31 above, and further in view of U.S. Patent No. 5,841,411 by Francis.

As to **claim 5**, Mori as modified by Martin does not teach that a correction signal is applied to one or more of the subpixels at which the violation of the periodic dot inversion

Art Unit: 2629

polarity scheme occurs and the applied a correction signal counters a loss of luminance caused by the violation.

However, Francis teaches the concept of applying a correction signal to one or more subpixels at which a periodic dot inversion polarity scheme does not occur to compensate a loss of the luminance caused by not having the periodic dot inversion [col. 2 lines 29-56] (Note that the vertical cross-talk can be prevented by the periodic dot inversion.).

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the liquid crystal display of Mori as modified by Martin to apply a correction signal to one or more subpixels at which the periodic dot inversion polarity scheme does not occur to compensate a loss of the luminance caused by not having the periodic dot inversion, as taught by Francis, in order to reduce the luminance loss caused by the vertical cross-talk.

As to **claim 12**, Mori as modified by Martin does not teach that a correction signal is provided to one or more of the subpixels in the group of subpixels at which the violation of the periodic dot inversion polarity scheme occurs, wherein the provided correction signals counter loss of luminance caused by the violation.

However, Francis teaches the concept of providing a correction signal to one or more subpixels in a group of subpixels at which a violation of a periodic dot inversion polarity scheme occurs, wherein the provided correction signal counter loss of luminance caused by the violation [col. 2 lines 29-56] (Note that the vertical cross-talk can be prevented by the periodic dot inversion.).

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the liquid crystal display of Mori as modified by Martin to provide a correction signal

Art Unit: 2629


to one or more subpixels in a group of subpixels at which a violation of a periodic dot inversion polarity scheme occurs, wherein the provided correction signal counter loss of luminance caused by the violation, as taught by Francis, in order to reduce the luminance loss caused by the vertical cross-talk.

9. **Claims 32-35** are rejected under 35 U.S.C. 103(a) as being unpatentable over Mori in view of Martin and U.S. Patent No. 7,259,755 by Ahn.

As to **claim 32**, Mori teaches a liquid crystal display [abstract lines 1-2] comprising:

a panel [drawing 4 provided below, which is same as figure 15 of Mori] organized as rows and columns of subpixels, the panel being substantially tessellated by a primitive subpixel repeating group comprising differently colored and individually addressable subpixels, the primitive subpixel repeating group being a smallest chooseable repeating group among possible repeating groups substantially tessellating the panel and the said primitive repeating group having an even number of subpixels where at least two of them are individually addressable subpixels and an even number of columns, said primitive repeating group including in each row thereof, a first colored subpixel, a second colored subpixel, and a third colored subpixel; and

a driver circuit sending to the panel, image signals representing image data [col. 1 lines 47-52 and col. 12 lines 12-17].

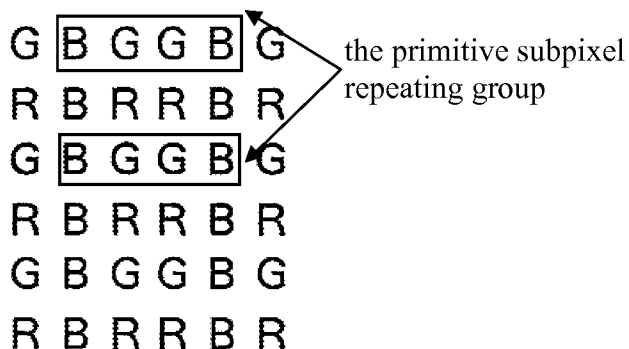

Drawing 4

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other, wherein the primitive subpixel repeating group is tessellated in a staggered manner over the panel so as to thereby define both multi-colored columns and spaced apart uni-colored columns, the uni-colored columns each consisting of subpixels of just one of the first through third different colors, where the color of the first colored subpixels is one to which the human visual system has lower luminance change sensitivity than to other colors of other colored ones of the subpixels in the subpixel repeating group. In other words, because Mori teaches two same colored subpixels [drawing 4 provided on page 23 of this Office action, “GG” and “RR”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

Art Unit: 2629

Mori as modified by Martin [drawing 5 provided on page 25 of this Office action] teaches that the first colored subpixel [drawing 5, the first blue subpixel in the box], the second colored subpixel [drawing 5, the red subpixel in the box], and the third colored subpixel [drawing 5, the green subpixel in the box] have different colors from each other, wherein the primitive subpixel repeating group is tessellated in a staggered manner over the panel so as to thereby define both multi-colored columns [drawing 5, the two adjacent “R” and “G” arranged in the first and second rows, and third column] and spaced apart uni-colored columns [drawing 5, the two adjacent “B”’s arranged in the first and second rows, and second column], the uni-colored columns each consisting of subpixels of just one of the first through third different colors, where the color of the first colored subpixels is one to which the human visual system has lower luminance change sensitivity than to other colors of other colored ones of the subpixels in the subpixel repeating group.

G	B R G B	R
R	B	G R B G
G	B	R G B R
R	B	G R B G
G	B	R G B R
R	B	G R B G

Drawing 5

Mori as modified by Martin does not teach that the driver circuit uses a multi-row inversion polarity scheme that uses a same polarity start of inversion within groups of adjacent rows but nonetheless provides dot inversion in the columnar direction as between adjacent rows

Art Unit: 2629

or as between one group of the adjacent rows and the next group and which further provides subpixel-to-subpixel dot inversion in the row direction substantially across each row but sporadically violates the in-row dot inversion polarity scheme in localized areas of the panel, where the localized areas of violation each includes one of the first colored subpixels such that potential image degradation introduced by the sporadic violation of the in-row dot inversion polarity scheme is localized to be lessened by the lower sensitivity to change of luminance of the first colored subpixels.


However, Ahn teaches that a driver circuit of a liquid crystal display uses a multi-row inversion polarity scheme that uses a same polarity start of inversion within groups of adjacent rows [fig. 5a, Note that Examiner construed each group of adjacent rows corresponding to each gate driver as a group. Thus, the first group has a polarity start of "+" in the first row and "-" in the second row and the second group has a polarity start of "+" in the first row and "-" in the second row.] but nonetheless provides dot inversion in the columnar direction as between adjacent rows or as between one group of the adjacent rows and the next group and which further provides subpixel-to-subpixel dot inversion in the row direction substantially across each row but sporadically violates the in-row dot inversion polarity scheme. [fig. 5a, Note that the black area has two same polarities adjacent to each other.].

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the driver circuit of Mori as modified by Martin to use Ahn's above disclosed polarity driving scheme, in order to reduce the image degradation of the liquid crystal display of Mori.

Mori as modified by Martin and Ahn [drawing 6 provided on page 27 of this Office action, which is same as figure 15 of Mori as modified by the subpixel arrangement of Martin

Art Unit: 2629

and the polarity driving scheme of Ahn] teaches that the violation of the in-row dot inversion polarity scheme occurs in localized areas of the panel [drawing 6, the two pixels adjacent to the border line in each of the rows], where the localized areas of violation each includes one of the first colored subpixels such that potential image degradation introduced by the sporadic violation of the in-row dot inversion polarity scheme is localized to be lessened by the lower sensitivity to change of luminance of the first colored subpixels (As shown on drawing 6 provided below, which is same (Note that since the blue subpixels adjacent to the border line have a negative polarity by violating the in-row dot inversion, the two closed blue subpixels in each row have the same polarity. Thus, the blue image degradation occurs.).

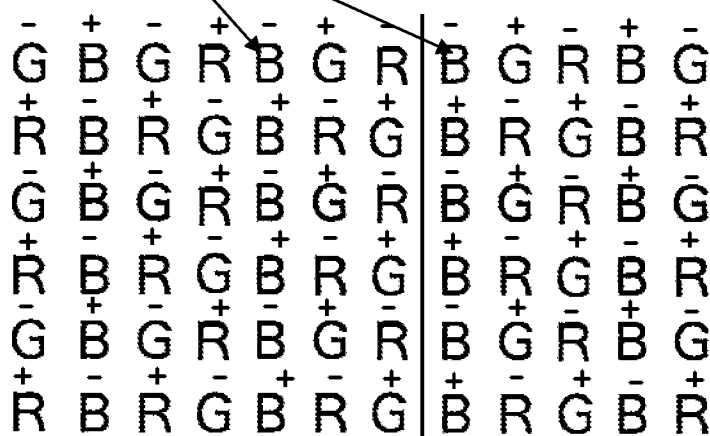Drawing 6

As to **claim 33**, Mori teaches a method used with a liquid crystal display [abstract lines 1-2] having a panel organized as rows and columns of subpixels, wherein the panel [drawing 4 provided on page 23 of this Office action, which is same as figure 15 of Mori] is substantially tessellated by a primitive subpixel repeating group, which primitive subpixel repeating group is smallest chooseable repeating group among possible repeating groups substantially tessellating the panel, and which primitive subpixel repeating group has an even number total of different

Art Unit: 2629

colored subpixels among which at least differently colored ones are individually addressable, the differently colored subpixels within a row of the primitive subpixel repeating group including a first colored subpixel, a second colored subpixel, and a third colored subpixel,

the method comprising:

providing driver signals to the subpixels in the panel data [col. 1 lines 47-52 and col. 12 lines 12-17].

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other, wherein the primitive subpixel repeating group is tessellated in a staggered manner over the panel so as to thereby define both multi-colored columns and spaced apart uni-colored columns, the uni-colored columns each consisting of subpixels of just the first colored subpixels, where the color of the first colored subpixels is one to which the human visual system has lower luminance change sensitivity than to other colors of other colored ones of the subpixels in the primitive subpixel repeating group. In other words, because Mori teaches two same colored subpixels [drawing 4 provided on page 23 of this Office action, “GG” and “RR”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to

Art Unit: 2629

avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

Mori as modified by Martin [drawing 5 provided on page 25 of this Office action] teaches that the first colored subpixel [drawing 5, the first blue subpixel in the box], the second colored subpixel [drawing 5, the red subpixel in the box], and the third colored subpixel [drawing 5, the green subpixel in the box] have different colors from each other, wherein the primitive subpixel repeating group is tessellated in a staggered manner over the panel so as to thereby define both multi-colored columns [drawing 5, the two adjacent “R” and “G” arranged in the first and second rows, and third column] and spaced apart uni-colored columns [drawing 5, the two adjacent “B”s arranged in the first and second rows, and second column], the uni-colored columns each consisting of subpixels of just the first colored subpixels, where the color of the first colored subpixels is one to which the human visual system has lower luminance change sensitivity than to other colors of other colored ones of the subpixels in the subpixel repeating group.

Mori as modified by Martin does not teach that the method provides a substantially periodic dot inversion polarity scheme wherein a same polarity start of inversion occurs within groups of adjacent rows but nonetheless provides dot inversion in the columnar direction as between adjacent rows or as between one group of the adjacent rows and the next group and which substantially periodic dot inversion polarity scheme further provides subpixel-to-subpixel dot inversion in the row direction substantially across each row and provides driver signals to the

Art Unit: 2629

subpixels in the panel, wherein the providing of the driver signals causes sporadic violation subpixel-to-subpixel dot inversion in the row direction, but where the sporadic violations are localized at one or more of the columns of first colored subpixels such that potential image degradation introduced by the sporadic violation subpixel-to-subpixel dot inversion in the row direction is lessened due to the lower sensitivity to change of luminance of the visual system for the column of first colored subpixels.

However, Ahn teaches a method of driving a liquid crystal display [abstract], which provides a substantially periodic dot inversion polarity scheme [fig. 5a] wherein a same polarity start of inversion occurs within groups of adjacent rows but nonetheless provides dot inversion in the columnar direction as between adjacent rows or as between one group of the adjacent rows and the next group [fig. 5a, Note that Examiner construed each group of adjacent rows corresponding to each gate driver as a group. Thus, the first group has a polarity start of "+" in the first row and "-" in the second row and the second group has a polarity start of "+" in the first row and "-" in the second row.] and which substantially periodic dot inversion polarity scheme further provides subpixel-to-subpixel dot inversion in the row direction substantially across each row and provides driver signals to the subpixels in the panel, wherein the providing of the driver signals causes sporadic violation subpixel-to-subpixel dot inversion in the row direction [fig. 5a, Note that the black area has two same polarities adjacent to each other.].

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the driver circuit of Mori as modified by Martin to use Ahn's above disclosed polarity driving scheme, in order to reduce the image degradation of the liquid crystal display of Mori.

Art Unit: 2629

Mori as modified by Martin and Ahn [drawing 6 provided on page 27 of this Office action, which is same as figure 15 of Mori as modified by the subpixel arrangement of Martin and the polarity driving scheme of Ahn] teaches that the sporadic violations are localized at one or more of the columns of first colored subpixels such that potential image degradation introduced by the sporadic violation subpixel-to-subpixel dot inversion in the row direction is lessened due to the lower sensitivity to change of luminance of the visual system for the column of first colored subpixels (As shown on drawing 6 provided on page 27 of this Office action, which is same (Note that since the blue subpixels adjacent to the border line have a negative polarity by violating the in-row dot inversion, the two closed blue subpixels in each row have the same polarity. Thus, the blue image degradation occurs.).

As to **claim 34**, Mori teaches a method of providing image data in a liquid crystal display [abstract lines 1-2] having a panel [drawing 4 provided on page 23 of this Office action, which is same as figure 15 of Mori] that is substantially tessellated by a primitive subpixel repeating group, which primitive subpixel repeating group is smallest chooseable repeating group among possible repeating groups substantially tessellating the panel, and which primitive subpixel repeating group has an even number total of different colored subpixels wherein a row of the primitive subpixel repeating group contains a first colored subpixel, a second colored subpixel, and a third colored subpixel;

the method comprising:

providing signals for image data [col. 1 lines 47-52 and col. 12 lines 12-17].

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other, wherein the primitive subpixel

Art Unit: 2629

repeating group is tessellated so as to form at least one column of just blue subpixels on the panel. In other words, because Mori teaches two same colored subpixels [drawing 4 provided on page 23 of this Office action, “GG” and “RR”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

Mori as modified by Martin [drawing 5 provided on page 25 of this Office action] teaches that the primitive subpixel repeating group is tessellated so as to form at least one column of just blue subpixels on the panel.

Mori as modified by Martin does not teach that the method provides a substantially periodic dot inversion polarity scheme to the panel which creates a sporadically violated subpixel-to-subpixel dot inversion in the row direction, but where the sporadic violations are localized to the vicinity of the at least one column of just blue subpixels.

Art Unit: 2629

However, Ahn teaches a method of driving a liquid crystal display [abstract], which provides a substantially periodic dot inversion polarity scheme [fig. 5a] to a panel which creates a sporadically violated subpixel-to-subpixel dot inversion in a row direction, but where the sporadic violations are localized to the vicinity of the at least one column of subpixels [fig. 5a, Note that the black area has two same polarities adjacent to each other.].

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the driver circuit of Mori as modified by Martin to use Ahn's above disclosed polarity driving scheme, in order to reduce the image degradation of the liquid crystal display of Mori.

Mori as modified by Martin and Ahn [drawing 6 provided on page 27 of this Office action, which is same as figure 15 of Mori as modified by the subpixel arrangement of Martin and the polarity driving scheme of Ahn] teaches that the sporadic violations are localized to the vicinity of the at least one column of just blue subpixels (As shown on drawing 6 provided on page 27 of this Office action, which is same (Note that since the blue subpixels adjacent to the border line have a negative polarity by violating the in-row dot inversion, the two closed blue subpixels in each row have the same polarity. Thus, the blue image degradation occurs.).

As to **claim 35**, Mori teaches a liquid crystal display [abstract lines 1-2], comprising:

a display panel [drawing 4 provided on page 23 of this Office action, which is same as figure 15 of Mori] including a plurality of subpixels arranged as a staggered tessellation by a primitive subpixel repeating group; the primitive subpixel repeating group comprising an even number subpixels in a row direction thereof, including a first colored subpixel, a second colored subpixel, and a third colored subpixel; and

Art Unit: 2629

means for providing driver signals to the subpixels in the display panel to send image data [col. 1 lines 47-52 and col. 12 lines 12-17].

Mori does not teach that the first colored subpixel, the second colored subpixel, and the third colored subpixel have different colors from each other, wherein a column of only dark colored subpixels is included. In other words, because Mori teaches two same colored subpixels [drawing 4 provided on page 23 of this Office action, “GG” and “RR”] are arranged consecutively in each of the rows, Mori does not teach that the first, second, and third colored subpixels have different colors from each other.

However, Martin [drawing 3 provided on page 9 of this Office action, which is same as figure 2 of Martin] teaches the concept of arranging two different colored subpixels (the first “G” in the first row and the first “R” in the first row) consecutively in a row.

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the panel of Mori to arrange two different colored subpixels consecutively in a row to avoid arranging two same colored subpixels consecutively in a row such that a column of only dark colored subpixels is included, as taught by Marin, in order to provide an uniform color illumination by placing the four adjacent subpixels having two different colors in a pattern such that the two subpixels having a same color are not adjacent to each other in a horizontal direction and in a vertical direction.

Mori as modified by Martin does not teach that the image data has a dot inversion polarity scheme to the panel which creates a sporadically violated subpixel-to-subpixel dot inversion in a row direction, but where the sporadic violations are localized to the vicinity of the dark colored subpixels.

Art Unit: 2629

However, Ahn teaches a means for providing driver signals to subpixels in a display panel of a liquid crystal display [abstract], which send image data having a dot inversion polarity scheme [fig. 5a] creates a sporadically violated subpixel-to-subpixel dot inversion in a row direction, but where the sporadic violations are localized to the vicinity of subpixels [fig. 5a, Note that the black area has two same polarities adjacent to each other.].

It would have been obvious to one of ordinary skill in the art at the time of the invention to modify the driver circuit of Mori as modified by Martin to use Ahn's above disclosed polarity driving scheme, in order to reduce the image degradation of the liquid crystal display of Mori.

Mori as modified by Martin and Ahn [drawing 6 provided on page 27 of this Office action, which is same as figure 15 of Mori as modified by the subpixel arrangement of Martin and the polarity driving scheme of Ahn] teaches that the sporadic violations are localized to the vicinity of the dark colored subpixels (As shown on drawing 6 provided below, which is same (Note that since the blue subpixels adjacent to the border line have a negative polarity by violating the in-row dot inversion, the two closed blue subpixels in each row have the same polarity. Thus, the blue image degradation occurs.).

Conclusion

10. **THIS ACTION IS MADE FINAL.** Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire THREE MONTHS from the mailing date of this action. In the event a first reply is filed within TWO MONTHS of the mailing date of this final action and the advisory action is not mailed until after

Art Unit: 2629

the end of the THREE-MONTH shortened statutory period, then the shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than SIX MONTHS from the mailing date of this final action.

11. Any inquiry concerning this communication or earlier communications from the examiner should be directed to SEOKYUN MOON whose telephone number is (571)272-5552. The examiner can normally be reached on 8:30 am - 5:00 pm.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Sumati Lefkowitz can be reached on 572-272-3638. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

November 16, 2010

/Seokyun Moon/

Examiner, Art Unit 2629